

PRODUCT DATA SHEET

G , 104 4B

DE CA_I

G, fab B, s a ow s o e sandw,c pane i ade fro un,d,rect,ona f,ber ass re,nforced p eno,c fac,n s bonded to G, core HD i eta ara ,d oneyco b core


A__CA I


e pane, s des, ned for use as f oor, n, n t e car o areas of ar e co verça a, rcraft e pane could be used as a low so of e a, rcraft rade pane for a eys f oor, n, and but eads ree types of panes are avalable for vertical and ow strength applications.


FEA Æ

- H, , pact stren t
- Corros, on resistant
- Low s o e and tox city eneration
- L twe t
- erv,ce te perature ran e to ,F ,C

A_AI_ABI_ Y

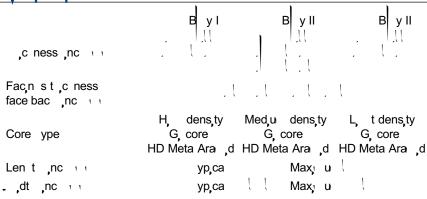

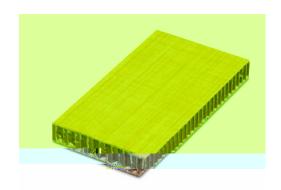



Epoxy

G, core HD eta ara ,d n d rect ona ass f ber

HEA H _RECA I

,s product,s safe to use and app y w en reconnected ended precaut,ons are followed. Before us, not is, s product read and understand the afety Data level Dilling with year of the provides information on least provides and environ length azards and in precaut,ons and first and reconnected endations. A Dilling sava, able at the least of the provides information of t

For industria use on y. Keep away fro ci, dren